

CB JUNIOR KIT INSTRUCTIONS





32 Alpha Park
Cleveland, Ohio 44143
phone 800.530.2289
website: www.custombrackets.com
email: info@custombrackets.com



The CB Junior has an adjustable flash upright and fold-out leg. The flash upright is adjustable for positioning the flash over the lens when in vertical position.


Attaching accessories MC, AP, FT-JR, AT to the CB Junior

The CB-Junior includes in the flash arm (1) 1/4" hole and (1) 1/4" x 20 threaded hole for attaching accessories.

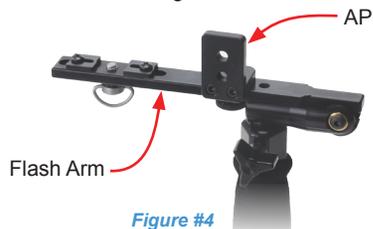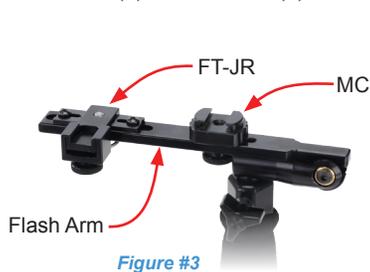

FT-JR	For a shoe mounting flash that does not use Canon or Nikon flash cords
MC	For attaching a radio slave or other shoe mounted accessory
AP	For attaching an accessory
AT	For anti-twist of the camera

Attaching the flash cord to the flash arm

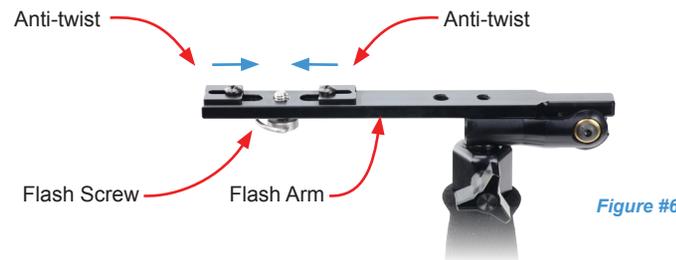

Flash anti-twist instructions

Canon off-camera cord II,
Canon Cord 3, Nikon SC-17
(first time installation)

- 1- Attach cord with flash screw (do not tighten completely)
- 2- Slide one anti-twist to cord (tighten anti-twist screw)
- 3- Slide other anti-twist to cord (tighten anti-twist screw)
- 4- Tighten flash screw to cord

Nikon SC-28, SC-29 Cords
(first time installation)

- 1- Attach cord (reversed) with flash screw (do not tighten completely)
- 2- Slide left anti-twist to cord (tighten anti-twist screw)
- 3- Remove cord and install (normal)
- 4- Slide right anti-twist to cord (tighten anti-twist screw)
- 5- Tighten flash screw to cord

Warranty

For a period of one year from date of purchase, Custom Brackets will repair or replace free of charge, any defect in material or workmanship. Warranty does not cover repairs due to customer abuse, negligence, impact or any modifications made by the customer. Warranty service is available by returning the Bracket (prepaid) to Custom Brackets. All returns must include a "RA" return authorization number (contact Custom Brackets to obtain), letter explaining the problem, and a copy of the sales receipt.

Repair

Repair service is available by returning the Bracket (prepaid) to Custom Brackets. All returns must include a "RA" return authorization number (contact Custom Brackets to obtain) and letter explaining the problem. A repair cost will be issued and must be approved prior to any repairs.

Maintenance

The Bracket was designed to be completely maintenance free. The flip tension is factory set, attempting to adjust the tension will void the warranty and may damage the bracket, camera or flash.