



Configuring the QRM-C for the camera



Figure #1

The quick release camera plate receiver (QRM-C) is packaged for cameras without battery packs / add-on vertical grips (figure #1).

Cameras with battery packs / add-on vertical grips, remove the (2) screws and reposition the vertical support and reinstall the (2) screws per (figure #2).



Figure #2

Attaching the QRM-C to the bracket

Attach the quick release camera plate receiver (QRM-C) to the bracket using the two screws (8-32 threads x 1/2" long socket head) and Allen wrench (5/64") supplied with the bracket.
Note: Loosen the "D" screw (see figure #5 below) and slide the receiver back to install screws.

Cameras without battery packs / add on vertical grips (figure #3)

Cameras with battery packs / add on vertical grips (figure #4)



Figure #3



Figure #4

Attaching your camera to the QRM-C

Loosen the "D" screw, slide the quick release camera plate receiver all the way back, install camera with (Manfrotto RC2 series plate) attached (center lens), tighten the "D" screw (camera clamp - see figure #3 - #4 above). Move camera forward, still allowing the camera to be quick released from the bracket.

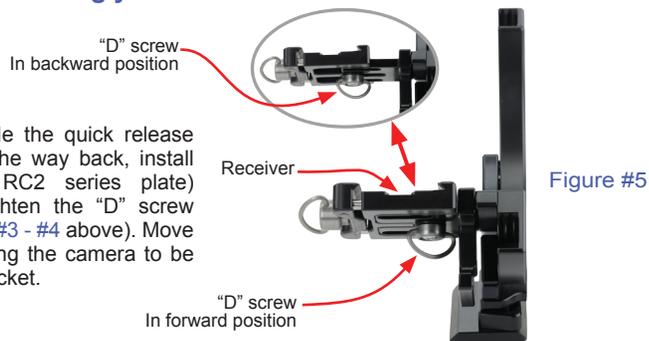


Figure #5

Using 2 cameras: (1) without battery pack / vertical grip and (1) with battery pack / vertical grip
Requires additional: (1)QRM-C, (1) QR-C Kit, and (1) CSP



Configuring the QRM-C for the camera



Figure #1

The quick release camera plate receiver (QRM-C) is packaged for cameras without battery packs / add-on vertical grips (figure #1).

Cameras with battery packs / add-on vertical grips, remove the (2) screws and reposition the vertical support and reinstall the (2) screws per (figure #2).



Figure #2

Attaching the QRM-C to the bracket

Attach the quick release camera plate receiver (QRM-C) to the bracket using the two screws (8-32 threads x 1/2" long socket head) and Allen wrench (5/64") supplied with the bracket.
Note: Loosen the "D" screw (see figure #5 below) and slide the receiver back to install screws.

Cameras without battery packs / add on vertical grips (figure #3)

Cameras with battery packs / add on vertical grips (figure #4)



Figure #3



Figure #4

Attaching your camera to the QRM-C

Loosen the "D" screw, slide the quick release camera plate receiver all the way back, install camera with (Manfrotto RC2 series plate) attached (center lens), tighten the "D" screw (camera clamp - see figure #3 - #4 above). Move camera forward, still allowing the camera to be quick released from the bracket.

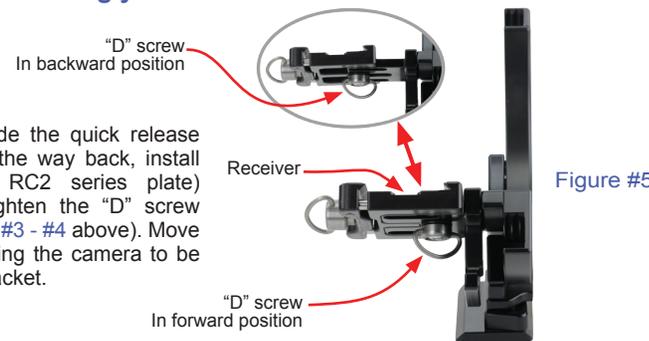


Figure #5

Using 2 cameras: (1) without battery pack / vertical grip and (1) with battery pack / vertical grip
Requires additional: (1)QRM-C, (1) QR-C Kit, and (1) CSP

Replacing the Bottom Plate with the CK-501

The bracket is packaged with a Custom Brackets bottom plate which must be removed in order to attach the CK-501 (Manfrotto RC2 series bottom plate). Using the Allen wrench (1/8") supplied with the QRM-C Kit or CK-501, unscrew the two screws from underneath the bracket (Figure #6). Once the bottom plate is removed, use the two new screws supplied (10-32 threads by 1/2" long flat head) and attach the CK-501 in according to (Figure #7).



Replacing the Bottom Plate with the CK-501

The bracket is packaged with a Custom Brackets bottom plate which must be removed in order to attach the CK-501 (Manfrotto RC2 series bottom plate). Using the Allen wrench (1/8") supplied with the QRM-C Kit or CK-501, unscrew the two screws from underneath the bracket (Figure #6). Once the bottom plate is removed, use the two new screws supplied (10-32 threads by 1/2" long flat head) and attach the CK-501 in according to (Figure #7).



USA: One Year Warranty

For a period of one (1) year from date of purchase, Custom Brackets will repair or replace free of charge, any defect in material or workmanship. Warranty does not cover repairs due to abuse, negligence, impact or any modifications made by the customer. Excessive force unscrewing knobs will void warranty. Warranty service is available by returning the product (shipping prepaid) to Custom Brackets. All returns must include a return authorization (RA) number (contact Custom Brackets to obtain), letter explaining the problem, and a copy of the sales receipt.

International: One Year Limited Warranty

For a period of one (1) year from date of purchase, Custom Brackets will repair or replace free of charge, any defect in material or workmanship. Warranty does not cover repairs due to abuse, negligence, impact or any modifications made by the customer. Excessive force unscrewing knobs will void warranty. Warranty service is available by returning the product (shipping prepaid) to Custom Brackets. All returns must include a return authorization (RA) number (email info@custombrackets.com to obtain), letter explaining the problem, and a copy of the sales receipt.

Repair

Repair service is available by returning the products (shipping prepaid) to Custom Brackets. All returns must include a return authorization (RA) number (contact Custom Brackets to obtain), letter explaining the problem, and a copy of the sales receipt. A repair cost will be issued and must be approved prior to any repairs. Shipping charges are the responsibility of the customer.

USA: One Year Warranty

For a period of one (1) year from date of purchase, Custom Brackets will repair or replace free of charge, any defect in material or workmanship. Warranty does not cover repairs due to abuse, negligence, impact or any modifications made by the customer. Excessive force unscrewing knobs will void warranty. Warranty service is available by returning the product (shipping prepaid) to Custom Brackets. All returns must include a return authorization (RA) number (contact Custom Brackets to obtain), letter explaining the problem, and a copy of the sales receipt.

International: One Year Limited Warranty

For a period of one (1) year from date of purchase, Custom Brackets will repair or replace free of charge, any defect in material or workmanship. Warranty does not cover repairs due to abuse, negligence, impact or any modifications made by the customer. Excessive force unscrewing knobs will void warranty. Warranty service is available by returning the product (shipping prepaid) to Custom Brackets. All returns must include a return authorization (RA) number (email info@custombrackets.com to obtain), letter explaining the problem, and a copy of the sales receipt.

Repair

Repair service is available by returning the products (shipping prepaid) to Custom Brackets. All returns must include a return authorization (RA) number (contact Custom Brackets to obtain), letter explaining the problem, and a copy of the sales receipt. A repair cost will be issued and must be approved prior to any repairs. Shipping charges are the responsibility of the customer.