


Tilt Head AS INSTRUCTIONS



32 Alpha Park
Cleveland, Ohio 44143
phone 446-446-0819
Toll Free 800-530-2289
website: www.custombrackets.com
email: info@custombrackets.com



Attaching lens plate to lens

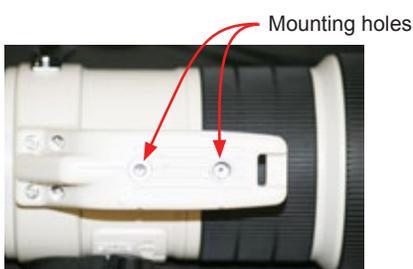

A lens may have 1/4" and/or 3/8" threaded holes. (1) 3/8" and (2) 1/4" screws are included with each lens plate. It is important to use the correct size.



Install screw(s) into lens plate at the labeled ends. The screw(s) and/or plate may be damaged if installed incorrectly. Some lenses will require both screws be in one slot.

The "D" screw has a fold out clip for hand tightening. A screwdriver slot is also included on the screw.

Do not insert any object as leverage into the "D" clip as it will damage screw and void warranty.

Attaching lens to Tilt Head AS



Attach lens with lens plate by loosening lens lock knob completely, then place lens plate into quick release. Tighten lens lock knob completely, then loosen 1/2 turn. Slide lens forward or backward to balance, then retighten lens lock knob.

If you have a replacement lens foot, use the same procedure above.

Attaching the Tilt Head AS to a monopod

Attach the Tilt Head AS to the monopod's 3/8"-16 mounting stud and tighten until firmly attached.


******* Caution *******

If you are using a monopod with a 1/4"-20 mounting stud, you will need to purchase a 3/8" to 1/4" reducer bushing and install it in bottom of the Tilt Head's base.

Indexing the quick release to accept a camera

Using the supplied allen wrench (3/16"), remove screw from the top of the quick release, then lift the quick release off the Tilt Head.

Align quick release far right image (Camera Setup) and align pins using pin holes #1 & #2 (see below) in top of the tilt head. Once in place, install screw into the top of the quick release of the Tilt Head. For Long Lens Setup, use pin holes #2 & #3.

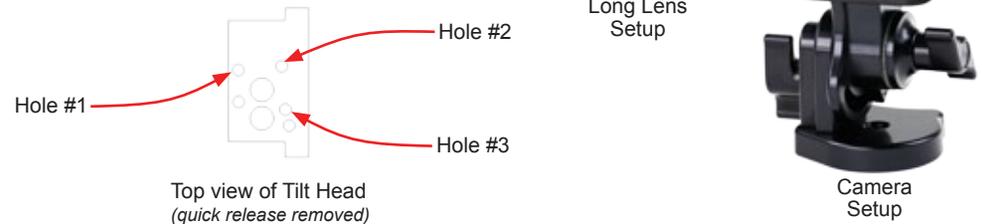

Tilt Head AS Features

The Tilt Head AS has many unique features. It is constructed from anodized aluminum for a lightweight and scratch-resistant finish. The tilt head has separate lock and drag knobs for better control. All knobs are captive to prevent loss. All of the fasteners are stainless steel to resist corrosion and black oxide for appearance.

USA 5 Year Warranty

For a period of five (5) years from date of purchase, Custom Brackets will repair or replace free of charge, any defect in material or workmanship. Warranty does not cover repairs due to abuse, negligence, impact or any modifications made by the customer. Excessive force unscrewing knobs will void warranty. Warranty service is available by returning the Tilt Head AS (shipping prepaid) to Custom Brackets. All returns must include a return authorization (RA) number (contact Custom Brackets to obtain), letter explaining the problem, and a copy of the sales receipt.

International 5 Year Limited Warranty

For a period of five (5) years from date of purchase, Custom Brackets will repair or replace free of charge, any defect in material or workmanship. Warranty does not cover repairs due to abuse, negligence, impact or any modifications made by the customer. Excessive force unscrewing knobs will void warranty. Limitation to the warranty - after year one shipping charges are not covered. Warranty service is available by returning the Tilt Head AS (shipping prepaid) to Custom Brackets. All returns must include a return authorization (RA) number (email info@custombrackets.com to obtain), letter explaining the problem, and a copy of the sales receipt.

Repair

Repair service is available by returning the Tilt Head AS (shipping prepaid) to Custom Brackets. All returns must include a return authorization (RA) number (contact Custom Brackets to obtain), letter explaining the problem, and a copy of the sales receipt. A repair cost will be issued and must be approved prior to any repairs. Shipping charges are the responsibility of the customer.

Maintenance

The Tilt Head AS is designed completely maintenance-free.